

# Ultimo

LUXURY VINYL TILES





Cement Stone 46905

# Content

## TABLE

|            |  |            |  |
|------------|--|------------|--|
| <b>#01</b> | <b>Intro</b><br>p. 5                                     | <b>#05</b> | <b>The perfect finish</b><br>p. 12       |
| <b>#02</b> | <b>Why choose Ultimo?</b><br>p. 7                        | <b>#06</b> | <b>Looks</b><br>p. 14                    |
| <b>#03</b> | <b>Ultimo, a performance multi-layered floor</b><br>p. 8 | <b>#07</b> | <b>Meet IVC Group</b><br>p. 32           |
| <b>#04</b> | <b>Installation</b><br>p. 10                             | <b>#08</b> | <b>Technical specifications</b><br>p. 34 |



Chapman Oak 24239

# Intro

U L T I M O

Luxury Vinyl Tiles (LVT) floors are a popular choice in homes because of the numerous benefits they offer. The durable vinyl planks and tiles consist of different layers, each one offering a specific characteristic. Developed and made in Belgium, Ultimo comes with the well-known benefits of LVT flooring: comfort, softness and warmth, while providing a seven-layer floor that gives the ultimate in performance.

Our design team went the extra distance to create a high-quality collection: a wide range of close to nature wood and stone effects in shades that bring an authentic look to every interior.

“

*Ultimate in performance, these Belgian-made floors are a delight to the eye.*

”



Paris Oak 22942

# Why choose Ultimo?

## BENEFITS OF ULTIMO

Soft, warm and quiet, Ultimo is a floor that makes everyone feel comfortable. What's more, its durable and long-lasting finish is beautifully simple to look after.

### High-quality

Made in Belgium, Ultimo's performance multi-layer construction is strong, stable and resistant to temperature changes. This means a floor that's been tested to meet Class 23 and 33, proving its quality for every type of room.



### Authentic beauty

With a design and finish that are close to nature, Ultimo stays faithful to the beauty of wood and stone. Its minimal pattern repeat means every room enjoys a natural look.



### Easy-going comfort

Choosing Ultimo means choosing a floor that's quickly installed and easy to maintain. Its soft underfoot feel, warmth and noise absorption guarantee a comfortable space.



### For a better planet

Because it lasts, Ultimo is a great sustainable choice. With recycled content and low impact manufacturing in Belgium, this is a floor that takes its responsibility to the planet seriously.



# Ultimo, a performance multi-layered floor

## HOW IS ULTIMO MADE?

Our R&D and production teams in Belgium are constantly innovating and always looking for ways to make better floors. Ultimo is a result of this collective effort: developed and manufactured in-house using the very best technology available to us today. Ultimo showcases the innovation of IVC Group with a compact multi-layer construction that delivers high performance. Scratch-resistant, stainproof and with excellent dimensional stability, this is a floor that's made to withstand life, day in and day out.

Let's look at Ultimo's multi-layer construction in a little more detail:



### 1 Protective Superguard® for superior resistance and easy maintenance



This is the icing on the cake performance-wise, giving Ultimo its superior scratch-resistance and an ability to fight off stains. Standing up to hard use, this protective layer makes Ultimo simple to clean and easy to keep looking after.

### 2 A reliable wear layer



The 0.55 mm thick wear layer makes sure that Ultimo's planks and tiles are tough enough for intense daily use and to meet the standards of class 23 and 33. The wear layer is made in-house for reliability and quality and that's why we back Ultimo with a long 20-year residential warranty.

### 3 A design layer that's close to nature



With Ultimo we aim to create beautiful and original natural designs printed with eco-friendly inks. The process is completely in-house, from inspiration to creation and production, so Ultimo comes with exclusive designs that you can't find anywhere else. By adding a bevel on the edges, it enjoys a more authentic natural look. What's more, we use a large pattern and cut out planks and tiles cleverly to avoid obvious repeats. This gives Ultimo a look that's closer to nature.

### 4 Double glass-fibre layer for the most stable floor



Ultimo's patented dual glass-fibre construction is the reason for its class-leading dimensional stability. It makes sure that Ultimo stays locked to the ground, regardless of temperature. Keeping movement to the bare minimum, the dual layers mean Ultimo can be used everywhere. So, whether a steamy bathroom, summery garden room or home office, Ultimo is ready for the challenge.

### 5 A durable compact core



While you may never see it, the compact core is crucial to Ultimo's durability. It provides the floor's indentation resistance to furniture and high heels. No matter how many people walk on it, Ultimo stays in great shape. Even better, we make this strong and durable compact core with up to 50% recycled content. Underlining just how important this layer is, Ultimo Click has a thicker compact core for a strong and secure click joint.

### 7 A sustainable backing layer with extra grip



Connecting Ultimo to the prepared subfloor beneath, the backing layer has an important part to play. We've added an embossed 'grip' texture to give the adhesive extra hold. There's also a direction arrow, so you know exactly which way to lay your plank and tile to create an authentic looking floor. This layer features up to 70% recycled content, another way we're reducing Ultimo's impact on the planet.



## GLOSSARY



Design



Strength



Green, eco-friendly, durable



Dimensional stability



Scratch & stain



Moisture protection

# Installation


## VINYL CLICK & DRYBACK SYSTEM

Ultimo is remarkably easy to install. Available in either glue or click flavours, you can choose the method that's best for you. Stick down or lock together, Ultimo's world-class dimensional stability and high-strength compact layer deliver a lasting result.




### CLICK

### DRYBACK

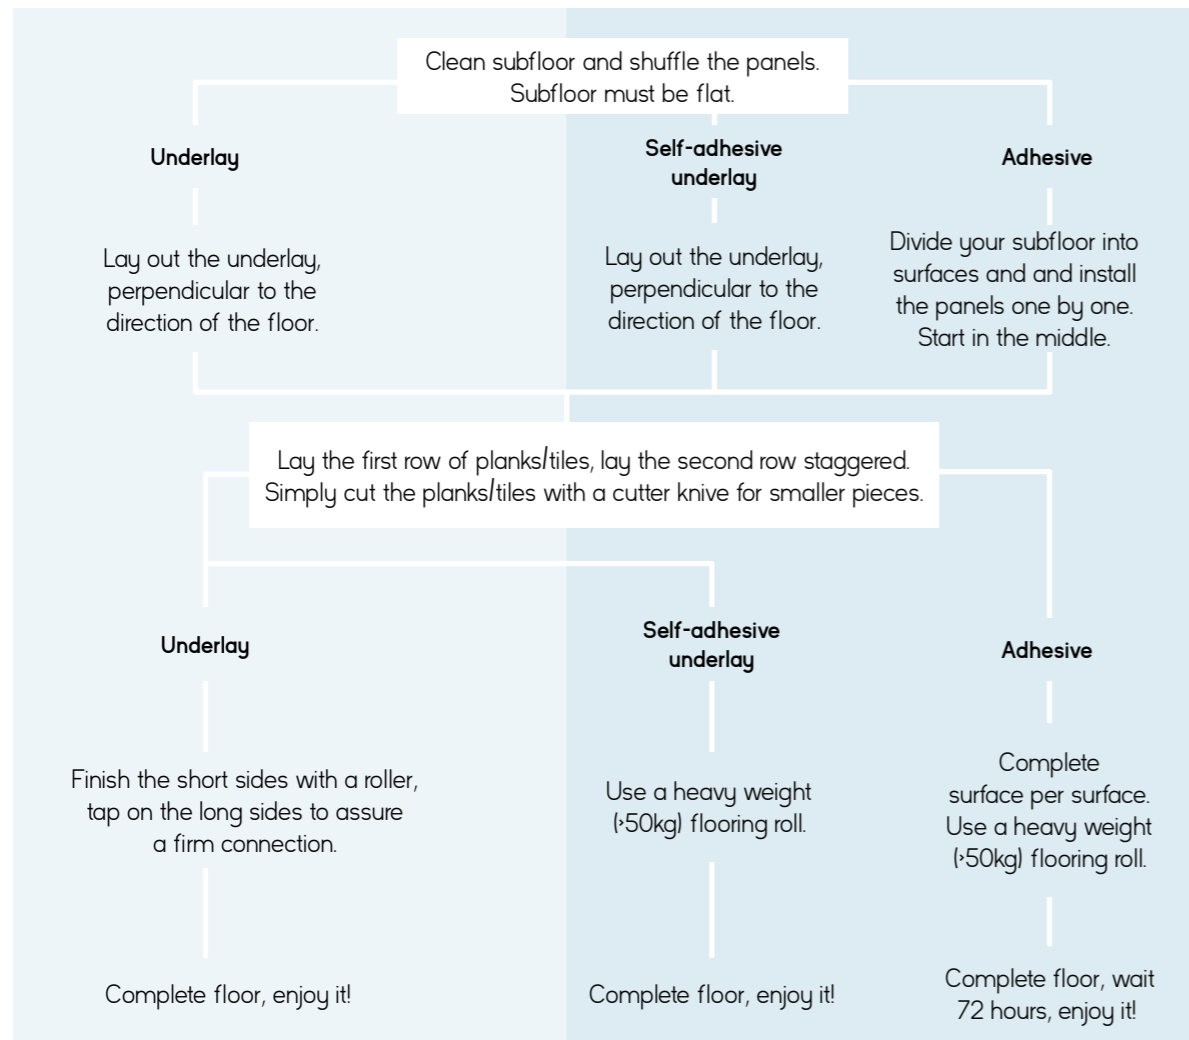

### Choose the correct underlay/adhesive

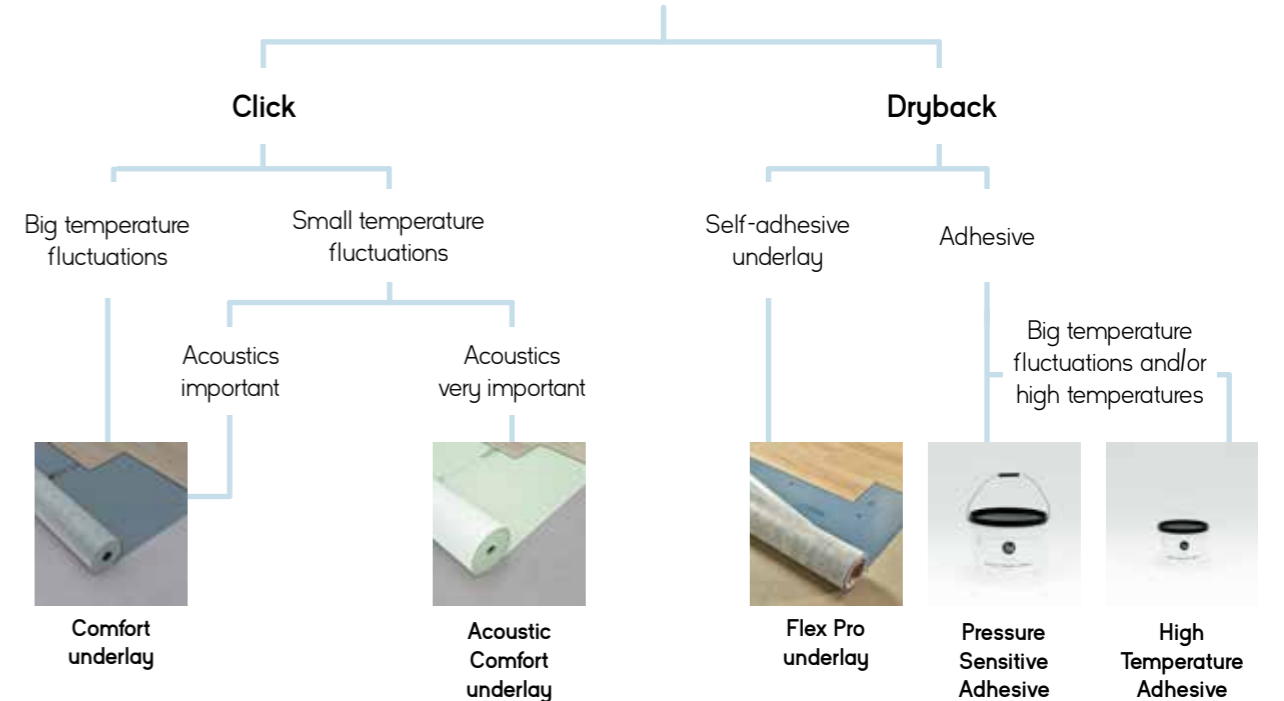

For detailed Click installation instructions, please check [www.installandclean.com/en/lvtclick](http://www.installandclean.com/en/lvtclick)



For detailed Dryback installation instructions, please check [www.installandclean.com/en/lvtdryback](http://www.installandclean.com/en/lvtdryback)



# The perfect finish

ACCESSORIES TO EASE YOUR MIND

For the perfect finish, you need the perfect range of accessories. From skirtings and profiles to cleaning and maintenance, we have everything you need, made to the same exacting standards as your Ultimo floor.



For more info, please check [www.xtrafloor.com](http://www.xtrafloor.com)



1. Stair profiles



2. End profile



3. Expansion profile



4. Radiator cap



5. Paintable skirting



6. Underlay



7. Joint strips



8. Joint filler

# Looks

CLOSER TO NATURE

Designed in Belgium from exacting studies of original materials, Ultimo captures the nuance and variety of nature, presenting a sophisticated range of decors. A refined bevel and a detailed emboss make it even more realistic. A wide range of natural wood looks in natural colours and realistic stone looks ensure a sophisticated look that will fit in any interior.







Summer Oak



24219



24244



24432



24820



24867



24935

 **Dryback**  
Available in:  
19,6 x 132 cm

 **Click Unidrop®**  
Available in:  
19,1 x 131,6 cm


 **4 sided bevel**

 **4 sided bevel**

 **Thickness**  
25 mm

 **Thickness**  
4,5 mm

 **Wear layer**  
0,55 mm

 **Wear layer**  
0,55 mm

Chapman Oak



24126



24238



24239



24245



24876



24885



24913



**Dryback**  
Available in:  
196 x 132 cm



**Click Unidrop®**  
Available in:  
191 x 1316 cm



**4 sided bevel**



**4 sided bevel**



**Thickness**  
25 mm




**Thickness**  
4.5 mm



**Wear layer**  
0.5 mm



**Wear layer**  
0.55 mm

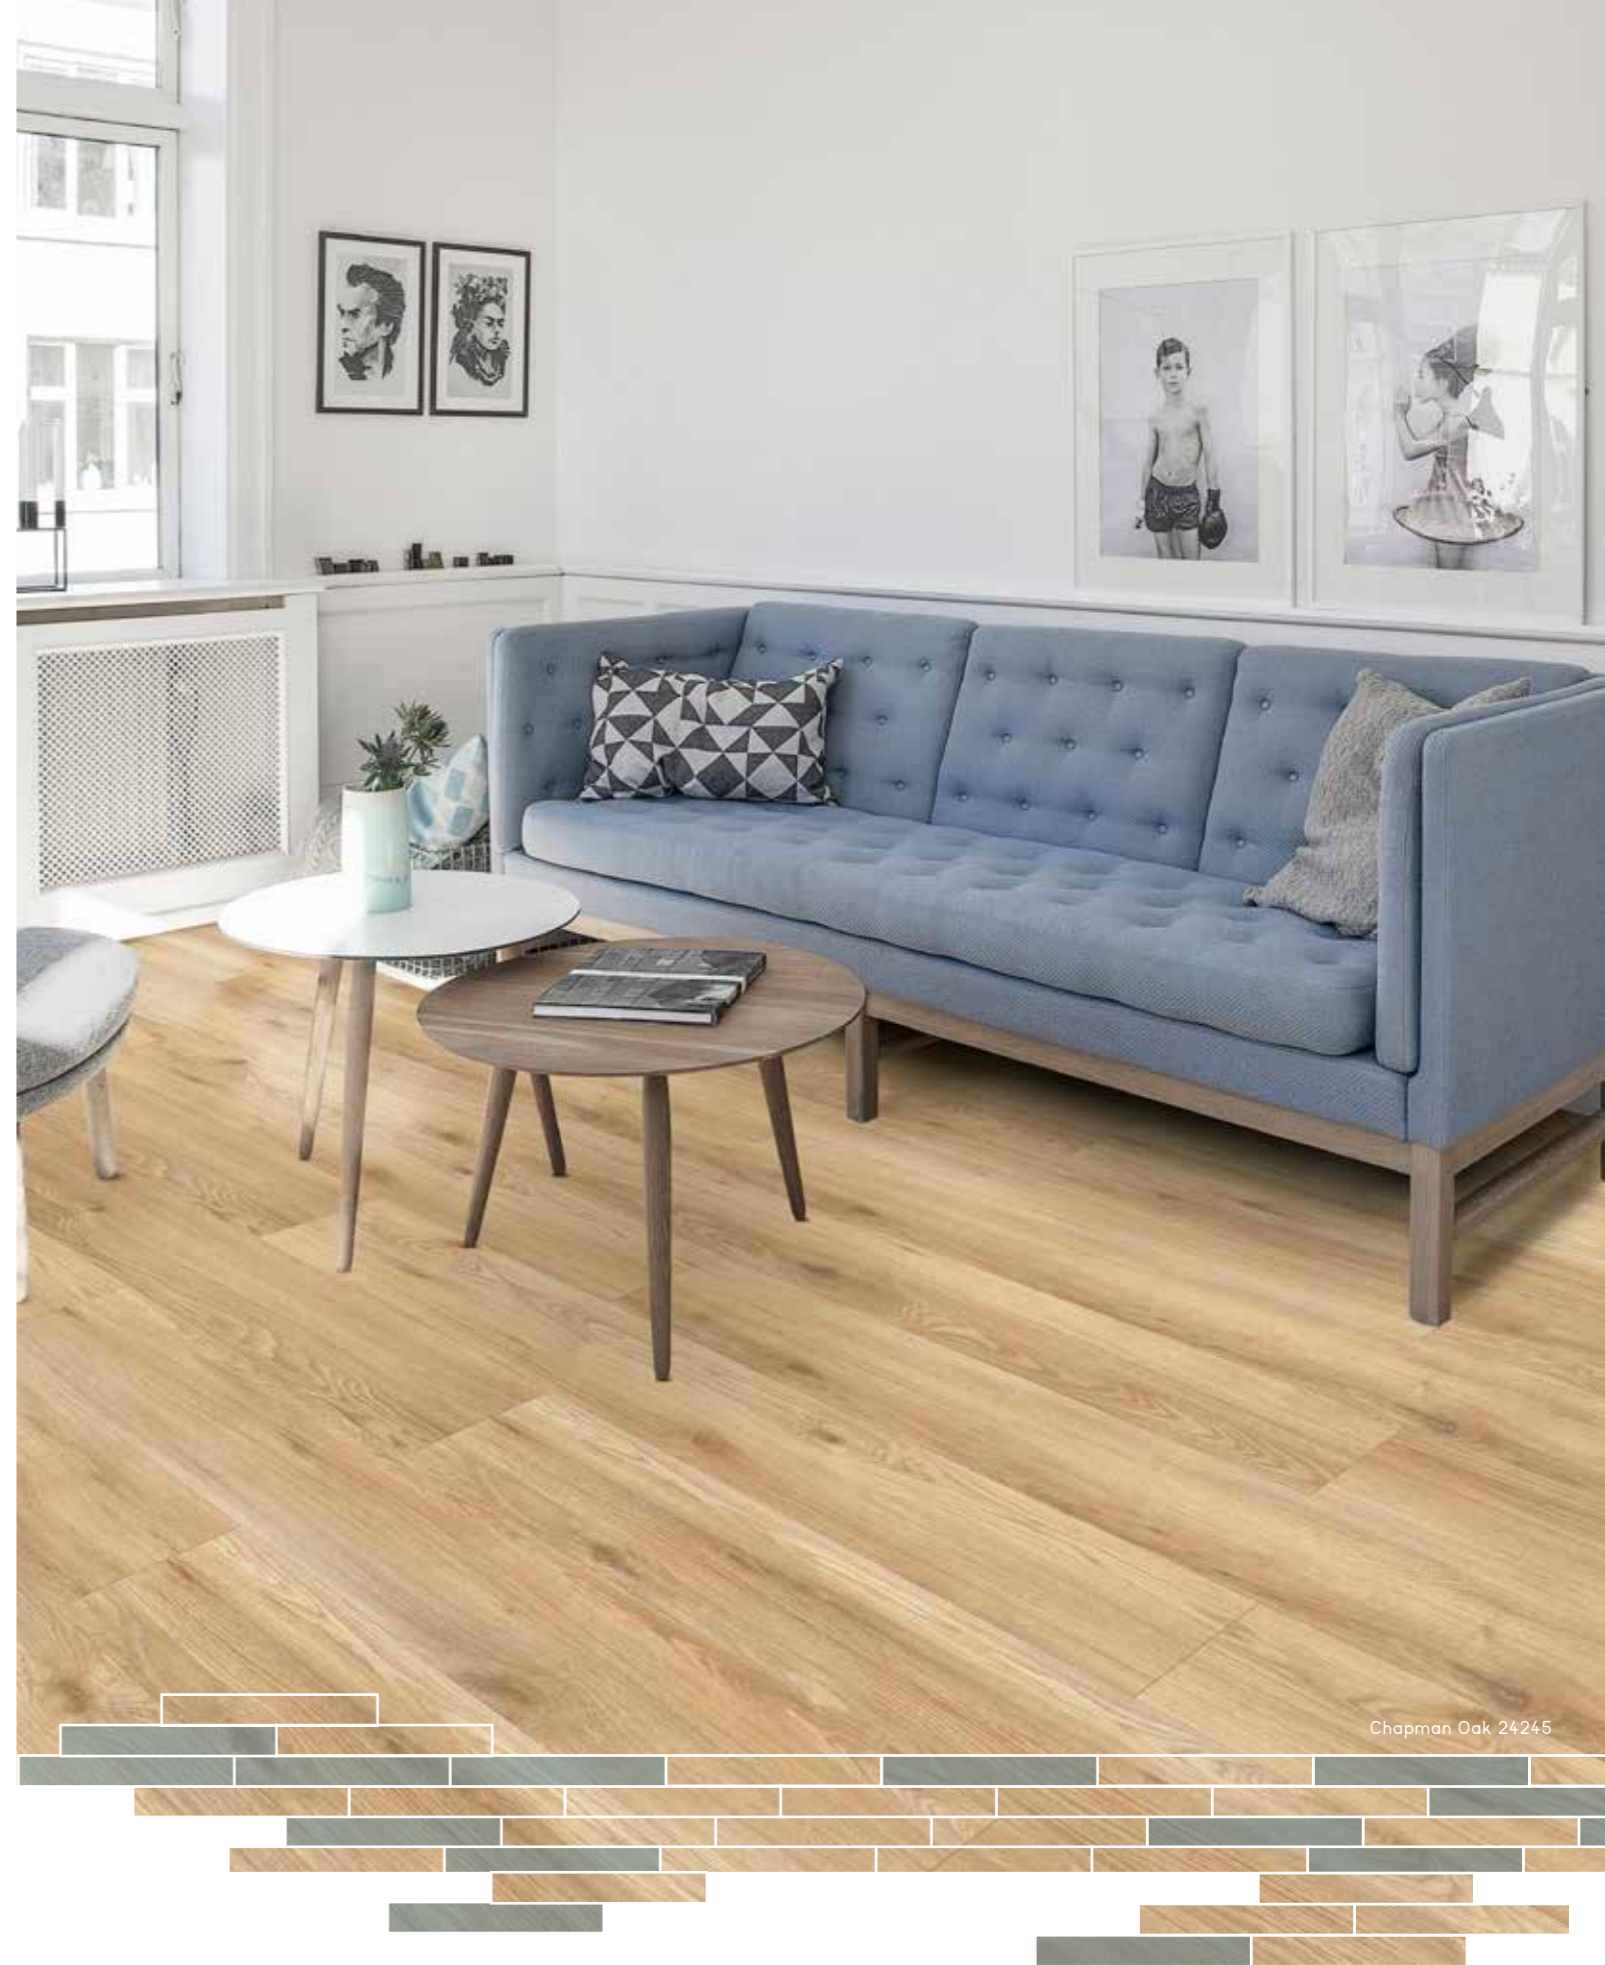

Chapman Oak 24245



Casablanca Oak 24220

Casablanca Oak



24123



24220



24234



24937

 **Dryback**  
Available in:  
19,6 x 132 cm


 **Click Unidrop®**  
Available in:  
19,1 x 131,6 cm


 **4 sided bevel**

 **4 sided bevel**

 **Thickness**  
25 mm

 **Thickness**  
4,5 mm

 **Wear layer**  
0,55 mm

 **Wear layer**  
0,55 mm

#06

Bear Oak



24823



24921



**Dryback**  
Available in:  
196 x 132 cm



**4 sided bevel**



**Thickness**  
25 mm



**Wear layer**  
0.55 mm



**Click Unidrop®**  
Available in:  
191 x 1316 cm



**4 sided bevel**



**Thickness**  
4.5 mm



**Wear layer**  
0.55 mm



Bear Oak 24823



Paris Oak 22230


### Paris Oak



22230



22942

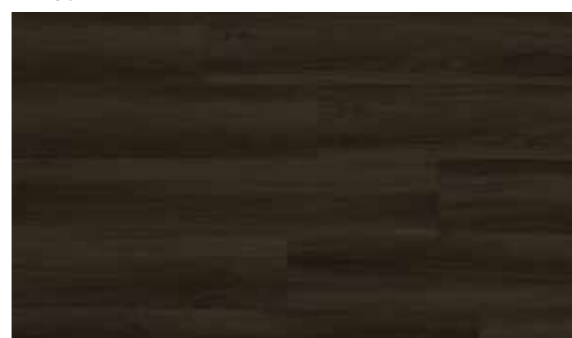

22949



**Dryback**  
Available in:  
19,6 x 132 cm



**Click Unidrop®**  
Available in:  
19,1 x 131,6 cm



**4 sided bevel**



**4 sided bevel**



**Thickness**  
25 mm



**Thickness**  
4,5 mm



**Wear layer**  
0,55 mm



**Wear layer**  
0,55 mm

Dorato Stone



46862



46937



**Dryback**  
Available in:  
329 x 659 cm



**Click Unidrop®**  
Available in:  
324 x 655 cm



**4 sided bevel**



**4 sided bevel**



**Thickness**  
25 mm



**Thickness**  
4.5 mm



**Wear layer**  
0.55 mm



**Wear layer**  
0.55 mm




Cement Stone 46953

Cement Stone




46905

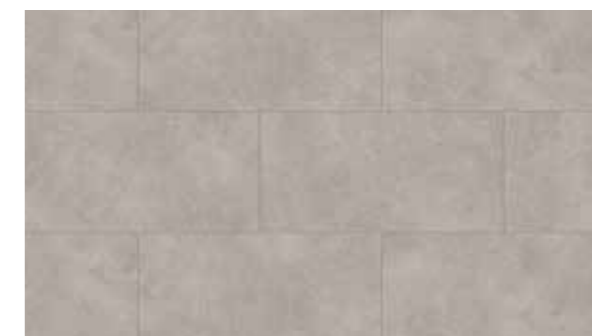

46953




46983

 **Dryback**  
Available in:  
329 x 659 cm

 **4 sided bevel**


 **Thickness**  
25 mm

 **Wear layer**  
0.55 mm

 **Click Unidrop®**  
Available in:  
324 x 655 cm

 **4 sided bevel**

 **Thickness**  
4.5 mm

 **Wear layer**  
0.55 mm

Vulcan Stone



46996



46998



**Dryback**  
Available in:  
329 x 659 cm



**4 sided bevel**



**Thickness**  
25 mm



**Wear layer**  
0.55 mm



**Click Unidrop®**  
Available in:  
324 x 655 cm



**4 sided bevel**



**Thickness**  
4.5 mm



**Wear layer**  
0.55 mm





# Meet IVC Group

IVC Group is a global player in the design and manufacturing of flooring solutions including Carpet Tiles, Luxury Vinyl Tiles (LVT), Heterogeneous Vinyl for use in business, public and private environments. Accountable for our actions, we design and make floors responsibly in Belgium, developing a circular approach to the future of flooring.

IVC Group is part of Mohawk Industries Inc., the world's largest flooring company. With 1,500 employees and 7 production sites in Europe and Russia, IVC Group produces over 130,000,000 m<sup>2</sup> of flooring every year.

### Did you know...

that IVC Group employs over 30 different nationalities worldwide? That's the many cultures and inspirations which go into our eclectic floor designs, explaining their global appeal.




Flooring Development Centre in Waregem, Belgium



On site wind farm to produce our own clean electricity in Belgium

## How we make our floors better for the environment?

At IVC Group, we truly believe in products that are developed with the future in mind. That's why we take the time to pause and reflect on the impacts of our entire strategy and operation, and we aim to contribute to the welfare of our planet and our people.

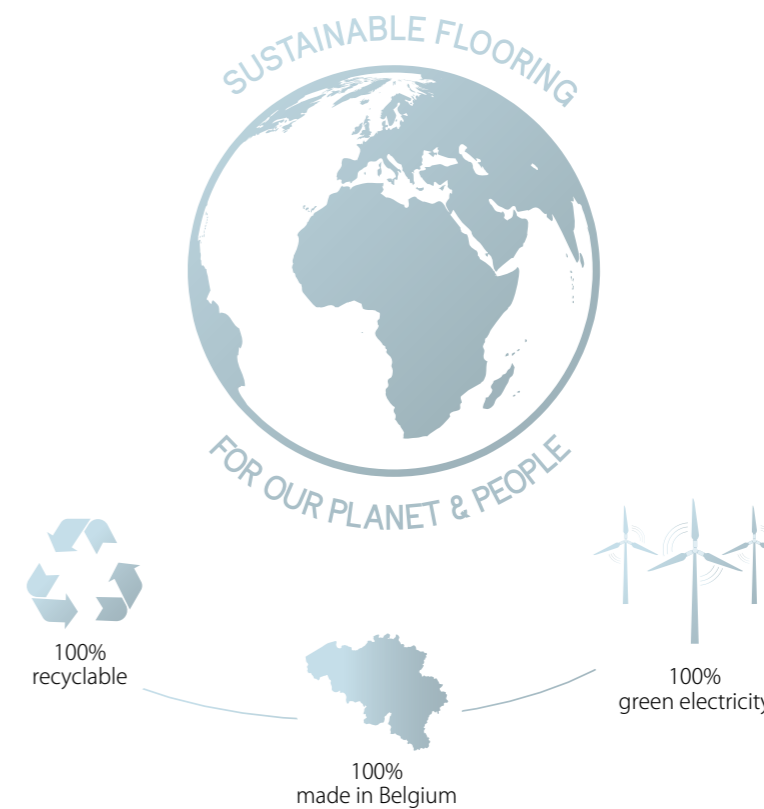

Read all about it in our [sustainability whitepaper](#)

# Technical specifications

## TECHNICAL INFO OF ULTIMO

Dryback Click

### PRODUCT INFORMATION


|                               |              |                 |                 |
|-------------------------------|--------------|-----------------|-----------------|
| Level of use                  | EN ISO 10874 | 23 - 33 - 41    | 23 - 33         |
| Total thickness               | EN ISO 24346 | 2.5 mm          | 4.5 mm          |
| Wear layer                    | EN ISO 24340 | 0.55 mm         | 0.55 mm         |
| Wear Layer PUR treatment      |              | Superguard Pro® | Superguard Pro® |
| Total weight g/m <sup>2</sup> | EN ISO 23997 | 4105.5          | 7805.5          |

### SIZE & PACKING

|            |              |                                   |                                  |
|------------|--------------|-----------------------------------|----------------------------------|
| Planks     | EN ISO 24342 | 19.6 x 132 cm                     | 19.1 x 131.6 cm                  |
| Tiles      | EN ISO 24342 | 32.9 x 65.9 cm                    | 32.4 x 65.5 cm                   |
| Box planks |              | 3.62 m <sup>2</sup><br>14 pcs/box | 1.76 m <sup>2</sup><br>7 pcs/box |
| Box tiles  |              | 3.47 m <sup>2</sup><br>16 pcs/box | 1.49 m <sup>2</sup><br>7 pcs/box |

### TEST RESULTS

|  |                |  |  |
|--|----------------|--|--|
| Inflammability                                   | EN 13501       | Bfl-S1   |  |
| Abrasion group                                   | EN ISO 660-2   | Class T  |  |
| Scratch resistance                               | EN 16094       | ≤MSR-A2, ≤MSR-B2                               |  |
| Squareness                                       | EN ISO 24342   | ≤ 0.35 mm                                      |  |
| Straightness                                     | EN ISO 24342b  | ≤ 0.35 mm                                      |  |
| Slip resistance                                  | EN 13893       | DS   |  |
| Slip restraint                                   | DIN 51130      | R10  |  |
| Residual indentation                             | EN ISO 24343-1 | Norm: ≤ 0.10 mm<br>Average result: 0.03 mm     |  |
| Furniture leg resistance                         | EN ISO 16581   | No cracks, no damage                           |  |
| Curling  | EN ISO 23999   | ≤ 1.21 mm                                      | ≤ 1.11 mm                                      |
| Dimensional stability                            | EN ISO 20326   | Norm: ≤ 1.0251 %<br>Average result: ≤ 1.0051 % | Norm: ≤ 1.0151 %<br>Average result: ≤ 1.0051 % |
| Thermal resistance R                             | EN 12667       | 0.0100 m <sup>2</sup> K/W                      | 0.0159 m <sup>2</sup> K/W                      |
| Acoustic insulation                              | EN ISO 717-2   | 4 dB   |  |
| Acoustic insulation + Xtrafloor Acoustic Comfort |                | 19 dB  |  |
| Castor chair resistance                          | EN ISO 4918    | No damage to wearlayer, no delamination        |  |
| Stain resistance                                 | EN ISO 26987   | Very good                                      |  |
| Light fastness                                   | EN ISO 105-B02 | ≥ 6  |  |
| Underfloor heating and cooling                   | EN 12524       | Suitable, max 27°C                             |  |
| Maximum allowed ambient and surface temperature  |                | 45° C  |  |
| Warranty (year)                                  |                | 20 Residential - 10 Commercial                 |  |

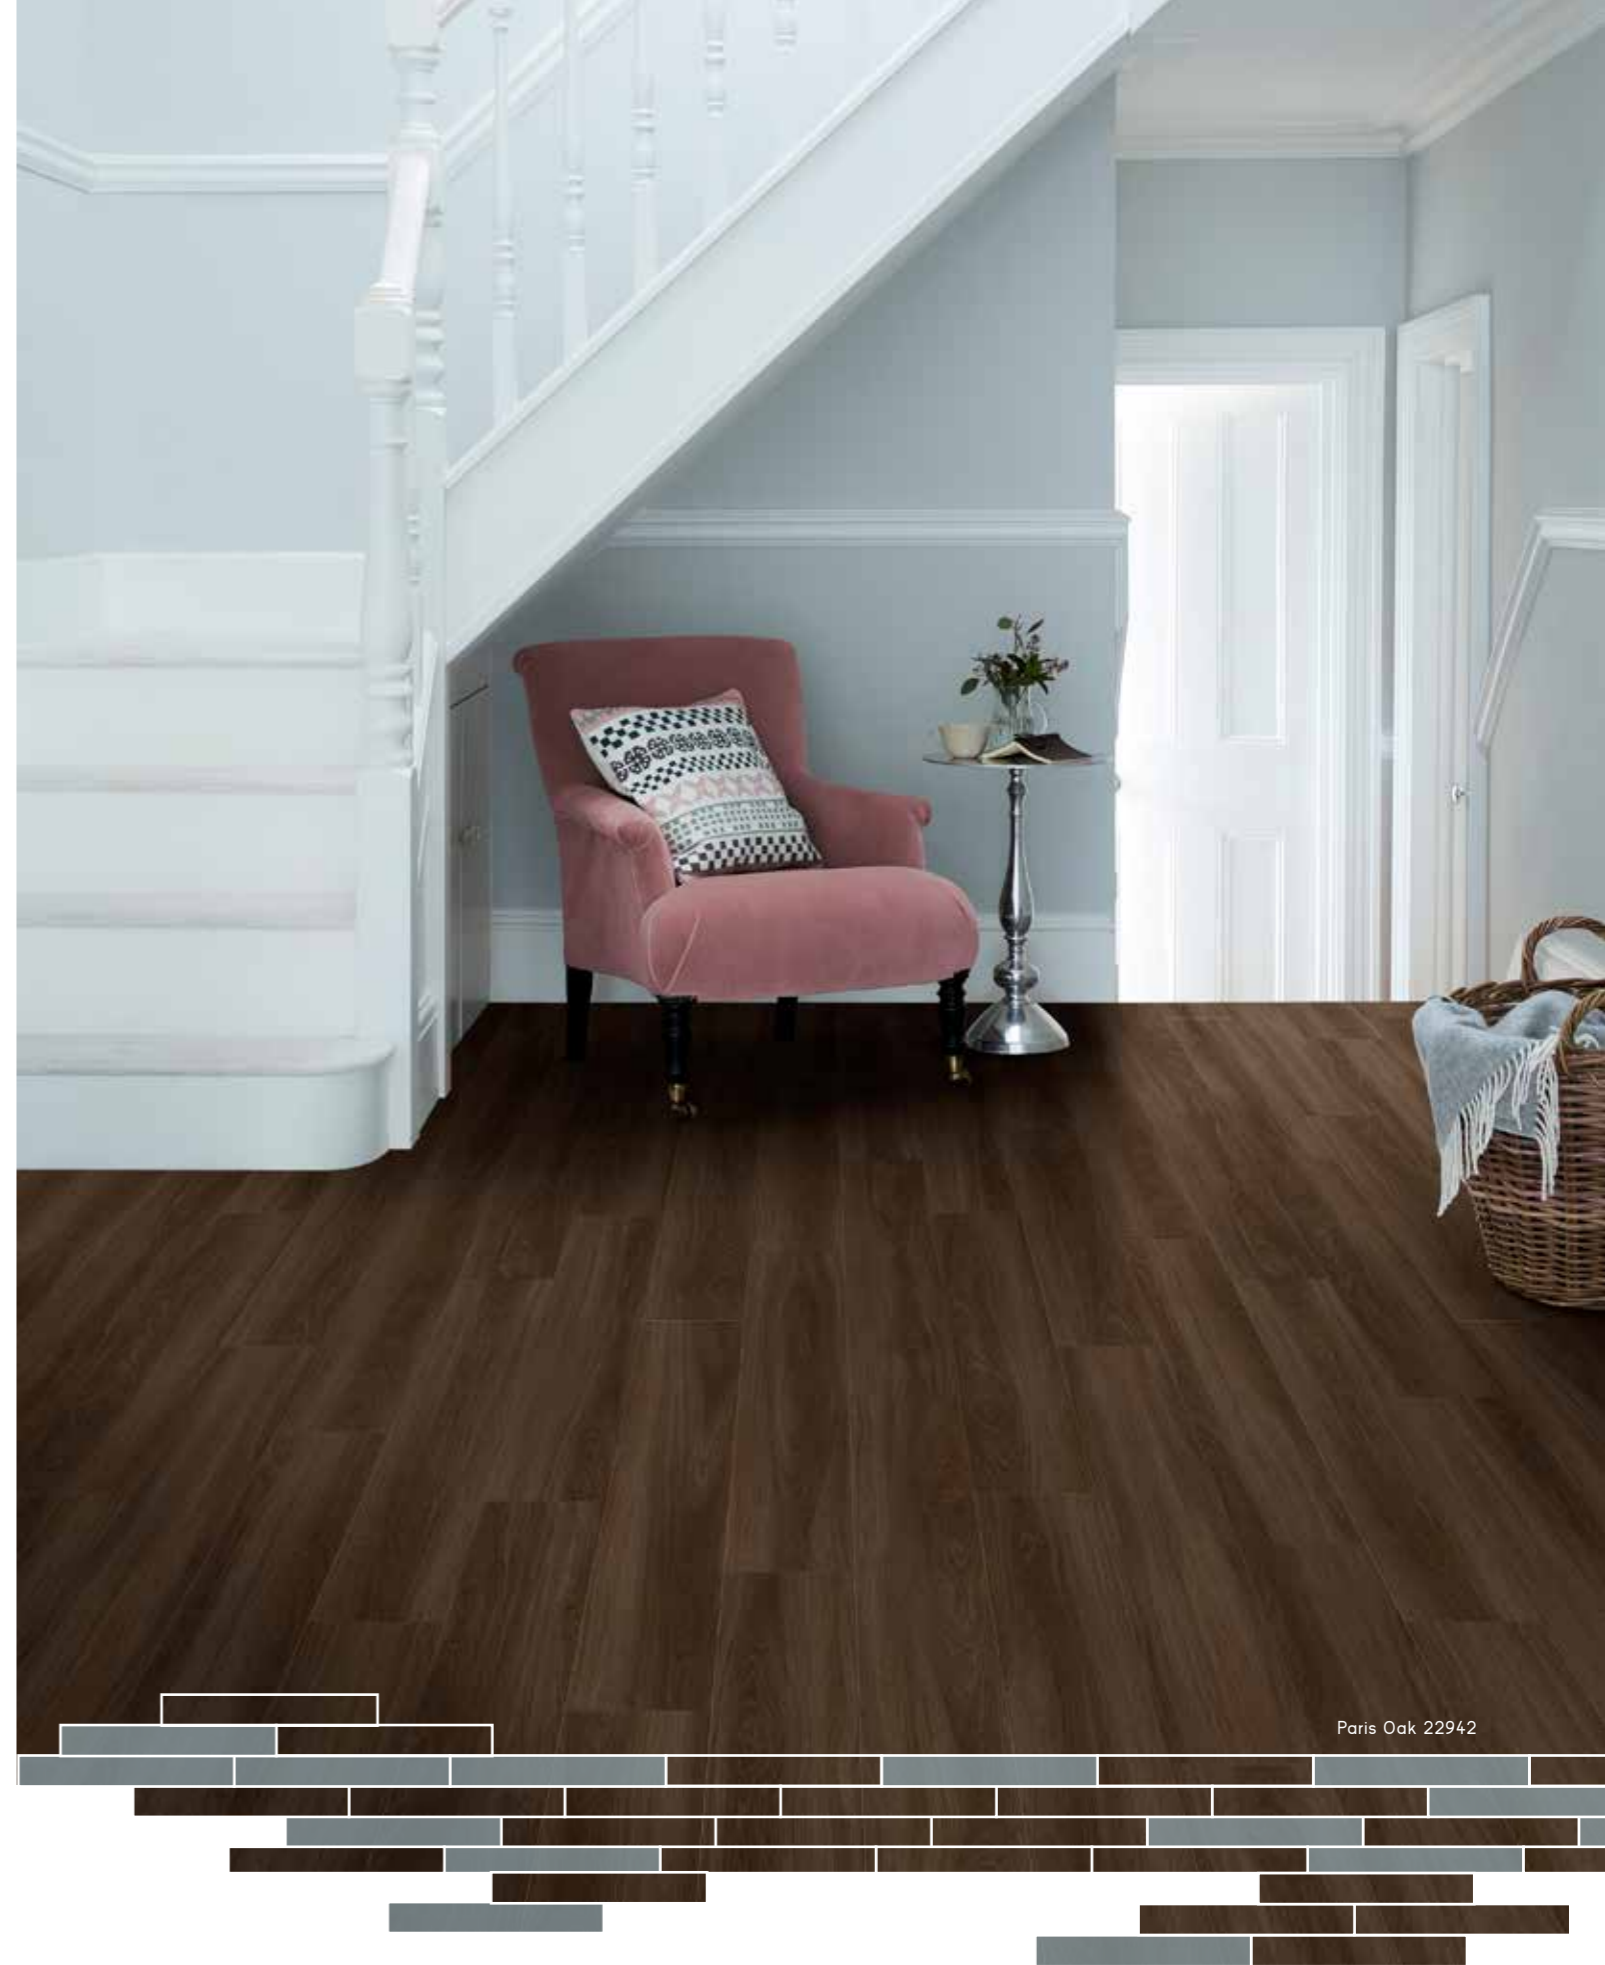

Paris Oak 22942



The warranty covers manufacturing defects and premature wear in the event of normal use.

# DESIGN | FLOORS

by  **ivc** group

Nijverheidslaan 29 | 8580 Avelgem | Belgium  
T +32 [0]56 653 211 | [info@ivcgroup.com](mailto:info@ivcgroup.com)  
[www.ivcgroup.com](http://www.ivcgroup.com)  
BTW BE 0866.682.231